

Smart and Convenient Network Intercom Station



TID-600R

- Small and slim form factor
- Full duplex two-way communication
- Best-in-class images with 2MP sensor and WDR
- 16.4ft (5m) IR viewable length
- Wide FoV - HFoV 180°, VFoV 114°
- Touchless call
- SIP 2.0 support




Optimised video quality and wide FoV for your entrance

The TID-600R features a 2 megapixel sensor with Hanwha Techwin's signature Wide Dynamic Range and low light performance for best-in-class images.

Strong 150dB WDR (Wide Dynamic Range)

Hanwha Techwin's signature WDR technology built into the TID-600R helps to produce clear images from scenes containing a challenging mix of bright and dark areas which normally results in overexposed or underexposed images.

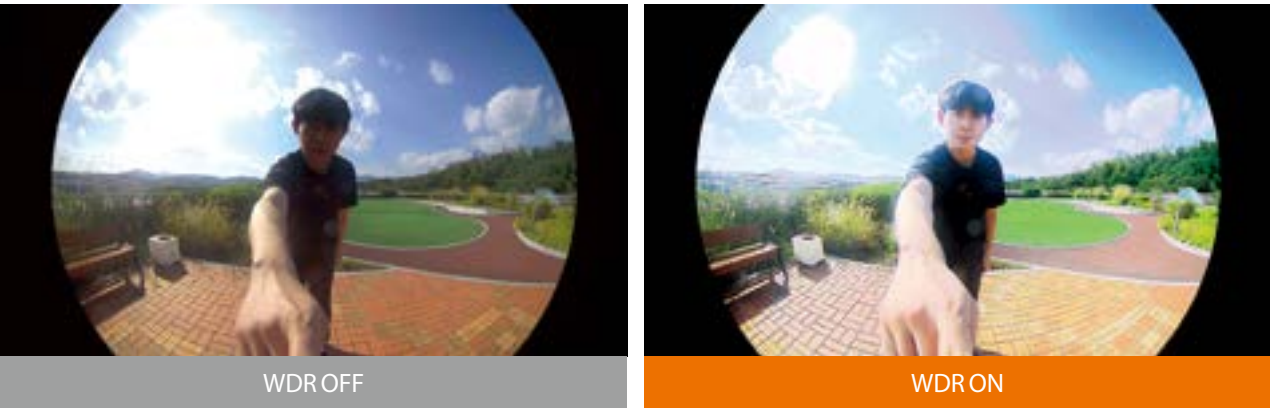


16.4ft (5m) IR viewable length

The TID-600's IR provides up to 16.4ft (5m) of illumination from the station at night achieving clear visibility of objects even in complete darkness (0 lux).



Wide Field of View for a wide range of applications

The TID-600R has a wide field of view, 180° horizontal and 114° vertical, making it suitable for various applications as it can capture from 14.2 inches (36cm) to 100.4 inches (255cm) tall objects. (When an object is 29.5 inches away from the station)

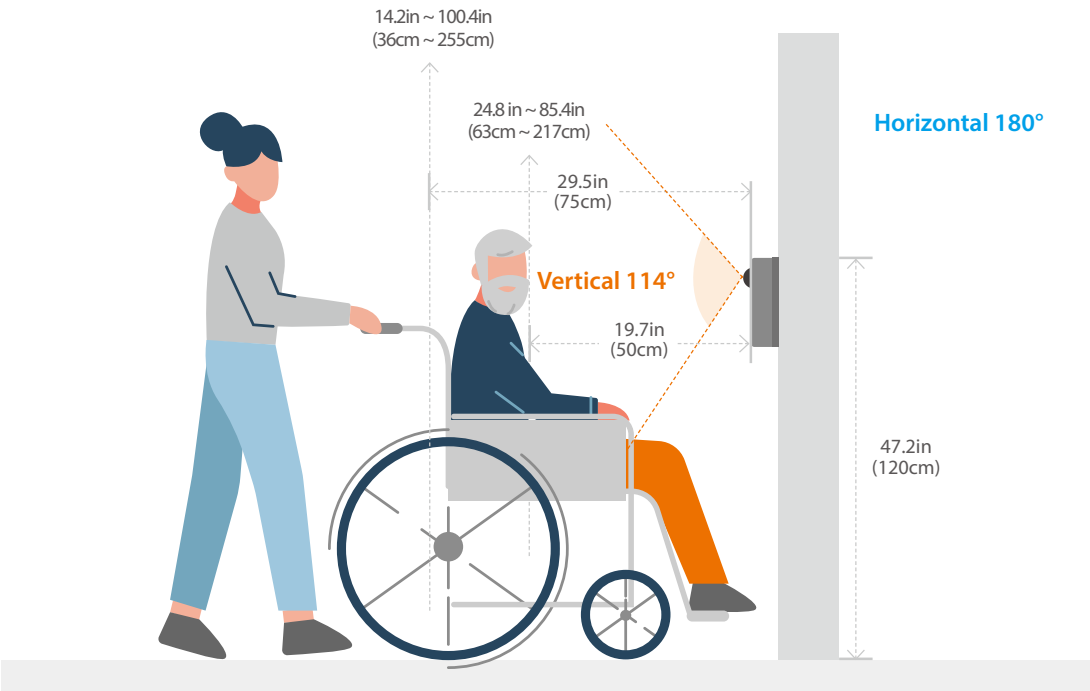

* Various applications including Schools, Nursing home, Residence, Commercial building, Warehouse and more

Full duplex two-way talk with clear sound

With full duplex two-way communication, echo cancellation and noise reduction technology, the built-in speaker and microphone provides excellent call clarity with up to 85 decibel of volume at 20 inches.



Various mounting options for a greater versatility

TID-600R is designed to be used in a variety of applications. Its small and slim form factor and contemporary product design offer both style and functionality. With multiple mounting options, covers and skin, it fits perfectly with its surroundings.



Default look		
White Skin SBC-165W		
Flush Mount with Cover SHS-165F		
Tilt Mount SBS-165TM		

Touchless call as an essential post COVID-19 safety protocol

The ToF sensor of the TID-600R allows touchless calls, where users simply present the palm of their hand within 6 inches of the station to initiate a call. Contagious diseases and outbreaks such as the coronavirus pandemic have created a massive surge in demand for touchless technology.



* It also offers a push-button call

Full support for SIP 2.0

With full support for SIP 2.0, the station can easily integrate with a wide variety of VMS, access control, SIP phones or PBX servers.



Specification



TID-600R	
Imaging Device	1/2.8" 2MP CMOS
Resolution	1920x1080 to 320 x 240
Maximum Framerate	H.265/H.264: 60fps, MJPEG: 30fps
Focal Length / FoV	1.6mm fixed focal F1.6 / H: 180°, V: 114°
IR Viewable Length	16.4ft (5m)
Backlight Compensation	BLC, HLC, WDR (150dB), SDR
Audio streaming	Two-way (Full duplex)/one-way selectable, Echo cancellation and noise reduction
Analytics	Directional detection, Motion detection, Appear/Disappear, Enter/Exit, Loitering, Tampering, Virtual line, Audio detection, Shock detection
Alarm I/O	Input 2ea / Output 1ea, Tampering switch, Relay out 1ea (Max. 550mA with 2A 12VDC adapter)
SIP (Session Initiation Protocol)	SIP 2.0 (RFC 3261 and companion RFCs)
Operating Temperature/ Humidity	-22°F ~ +131°F (-30°C ~ +55°C) Less than 95% RH
Certification	IP65, IK08, NEMA4X
Input Voltage	PoE, 12VDC
Color / Material	Dark gray / Aluminum
Dimension / Weight	W1.93" x D6.50" x H1.89" (49 x 165 x 48mm) 1.08lbs (490g)

NOTES

Hanwha Techwin Europe

Heriot House, Heriot Road, Chertsey, Surrey, KT16 9DT, United Kingdom

Tel: +44.1932.57.8100

Fax: +44.1932.57.8101

www.hanwha-security.eu

November 2021

© 2021 Hanwha Techwin Co., Ltd. All rights reserved.

DESIGN AND SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE

Under no circumstances, this document shall be reproduced, distributed or changed, partially or wholly, without formal authorization of Hanwha Techwin Co., Ltd.

* Wisenet is the proprietary brand of Hanwha Techwin, formerly known as Samsung Techwin.

